



**GASTROPARTS**

# Coven

- [EN]** Equipment
- [DE]** Geräte
- [ES]** Aparatos
- [FR]** Équipement
- [IT]** Attrezzature
- [PL]** Urządzenia
- [RU]** Оборудование

✉ [gastroparts@gastroparts.com](mailto:gastroparts@gastroparts.com)

☎ tel. +48 56 657 00 66

📘 [fb.com/gastroparts.global](https://fb.com/gastroparts.global)


**GASTROPARTS.COM**






## heating elements

### heating elements for proofing cabinets



1


<b>Part No.</b>	419234	<b>Ref. No.</b>	EMRSA025
<b>description</b>	heating element 2500W 240V heating circuits 2 L 538mm W 430mm flange length 100mm flange width 20mm hole distance 86mm connection length 60mm connection M5 tube ø 6.3mm flange leavening cabinet new edition		



1

<b>Part No.</b>	418972	<b>Ref. No.</b>	EMRSB033 EMRSB38333
<b>description</b>	heating element 3300W 240V heating circuits 1 ID ø 178mm ED ø 190mm L 205mm H 34mm L1 10mm W1 59mm H1 11mm H2 23mm flange length 100mm flange width 21mm hole distance 86mm connection male faston 6.3mm connection length 34mm tube ø 6.3mm convection heating element		

### heating elements for convection




1

<b>Part No.</b>	420084	<b>Ref. No.</b>	EMR10000
<b>description</b>	heating element 10000W 240V heating circuits 3 ID ø 340mm ED ø 350mm L 375mm H 110mm L1 23mm W1 102mm H1 14mm H2 96mm flange length 142mm flange width 25mm hole distance 63mm connection M4 tube ø 6.2mm hole ø 7mm		

## energy regulators


### EGO

#### 1-circuit



1

<b>Part No.</b>	380015	<b>Ref. No.</b>	EMPUAH00
<b>description</b>	energy regulator 230V 13A single-circuit turn direction right shaft ø 6x4.6mm shaft L 23mm mounting thread M4 power release 6-100% no. 50.57021.010		



1

<b>Part No.</b>	417288	<b>Ref. No.</b>	EMRSB160
<b>description</b>	heating element 1600W		

## thermostats

### control and safety thermostats

#### EGO


#### control thermostats

#### 55.10/19\_ series



1

<b>Part No.</b>	375860	<b>Ref. No.</b>	EMTS0300
<b>description</b>	thermostat t.max. 289°C temperature range 57-289°C 1-pole 1NO 16A probe ø 3.1mm probe L 226mm capillary pipe 1780mm capillary pipe isolated 1770mm gland nut shaft ø 6x4.6mm shaft L 23mm shaft position upper* rotation 270° probe material SS		



1


<b>Part No.</b>	418986	<b>Ref. No.</b>	EMRSB030
<b>description</b>	heating element 3000W 240V heating circuits 1 ID ø 180mm ED ø 186mm L 210mm H 31mm L1 11mm W1 60mm H1 7mm H2 24.5mm flange length 100mm flange width 22mm hole distance 86mm connection male faston 6.3mm connection length 34.5mm tube ø 6.25mm convection heating element hole ø 5mm rectangular flange		



<b>Part No.</b>	375654	<b>Ref. No.</b>	EMTS55ME
<b>description</b>	thermostat t.max. 99°C temperature range fixed 99°C 1-pole 1CO 16A probe ø 6mm probe L 74mm capillary pipe 900mm capillary pipe isolated 900mm gland nut		

## safety thermostats

55.10/19\_ series



<b>Part No.</b>	375857	<b>Ref. No.</b>	EMTSS350
<b>description</b>	safety thermostat switch-off temp. 350°C 1-pole 16A probe ø 3.1mm probe L 201mm capillary pipe 870mm capillary pipe isolated 870mm gland nut probe SS		

## switches and momentary switches

## push/momentary push switches

## miscellaneous



<b>Part No.</b>	347501	<b>Ref. No.</b>	EMDEVMOL
<b>description</b>	push switch black 2CO 250V 16A connection male faston 6.3mm ambient temperature max. 85°C protection IP40		

## microswitches

## pin-plunger actuated


M10



<b>Part No.</b>	346078	<b>Ref. No.</b>	EMMS1600
<b>description</b>	microswitch with plunger thread M10x0.75 250V 16A 1CO connection screw		

## cam switches

## on/off



<b>Part No.</b>	300129	<b>Ref. No.</b>	EMIG1600
<b>description</b>	cam switch 2 operating positions 2NO sequence 0-1 16A shaft ø 6x4.6mm shaft L 23mm connection male faston 6.3mm ceramic		

## 3 operating positions




<b>Part No.</b>	347498	<b>Ref. No.</b>	EMIGSFMX
<b>description</b>	cam switch sequence 1-0-2 shaft ø 6x4.6mm shaft L 23mm		

## 4 operating positions




<b>Part No.</b>	300236	<b>Ref. No.</b>	EMIGSLMX
<b>description</b>	cam switch 25/32A shaft ø 6x4.6mm shaft L 23mm 3-pole		



<b>Part No.</b>	347500	<b>Ref. No.</b>	EMIGSUMX
<b>description</b>	cam switch shaft ø 6x4.6mm shaft L 23mm connection male faston 6.3mm		




## encoders and potentiometers


 <p>1</p>			
<b>Part No.</b>	402935	<b>Ref. No.</b>	EMREST01
<b>description</b>	potentiometer for hot air oven 180Ohm L 214mm ø 32mm		


## lamps


### indicator lights

indicator lights (complete)			
ø12mm			
with screw socket			
 <p>1</p>			
<b>Part No.</b>	359027	<b>Ref. No.</b>	EMLSAHRO
<b>description</b>	indicator light ø 12mm 250V green connection male faston 6.3mm		

### screw-on/push-on fit


light bulbs			
for ovens			
 <p>1</p>			
<b>Part No.</b>	359610	<b>Ref. No.</b>	EMPLLAHO
<b>description</b>	light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 47mm lens L 20mm for oven lamp type Philips		

 <p>1</p>			
<b>Part No.</b>	359740	<b>Ref. No.</b>	EMPLLAHO
<b>description</b>	light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 48mm lens L 20mm for oven lamp IMPORT		

 <p>1</p>			
<b>Part No.</b>	359612	<b>Ref. No.</b>	EMPLLO25
<b>description</b>	light bulb t.max. 300°C socket E14 25W 230V ø 25mm L 56mm lens L 30mm for oven lamp type Philips		

## halogen lamp


for socket G4 / G6.35 / G9


 <p>1</p>			
<b>Part No.</b>	359945	<b>Ref. No.</b>	EMPLAL25
<b>description</b>	halogen lamp socket G9 230V 25W temp.-resist. 300°C		

## oven lamps

### universal oven lamps

mounting diameter 35.5mm

 <p>1</p>			
<b>Part No.</b>	357170	<b>Ref. No.</b>	EMPLP042
<b>description</b>	oven lamp mounting ø 35.5mm 230V 25W socket G9 temp.-resist. 300°C connection F6.3		

 <p>1</p>			
<b>Part No.</b>	359709	<b>Ref. No.</b>	EMPLG042
<b>description</b>	oven lamp glass thr.ø 33.5mm ø 42mm hard glas temp.-resist. 350°C		


 <p>1</p>				
<b>Part No.</b>	359705	<b>Ref. No.</b>	EMPLG800	
<b>description</b>	oven lamp glass thr.ø 33.5mm ø 52mm hard glas temp.-resist. 350°C			
<b>accessories for</b>	359705			
	<b>Part No.</b>	359610	<b>Ref. No.</b>	EMPLLAHO
	light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 47mm lens L 20mm for oven lamp type Philips			
	<b>Part No.</b>	359700	<b>Ref. No.</b>	—
	gasket for pizza oven fibre glass ID ø 32.5mm ED ø 55mm thickness 5mm			
	<b>Part No.</b>	359721	<b>Ref. No.</b>	—
	gasket silicone ED ø 48mm ID ø 39.5mm thickness 5mm Qty 1 pcs			
	<b>Part No.</b>	359837	<b>Ref. No.</b>	—
	gasket ID ø 33mm ED ø 46mm thickness 1mm graphite			
	<b>Part No.</b>	359838	<b>Ref. No.</b>	—
	gasket ID ø 33mm ED ø 45mm			



55x70mm



1

<b>Part No.</b>	359297	<b>Ref. No.</b>	EMPLQU25B
<b>description</b>	frame L 95mm W 81mm mounting distance 68/83mm thickness 6mm		
<b>accessories for</b>	359297		
	<b>Part No.</b>	359299	<b>Ref. No.</b> —
	gasket L 91mm W 77mm hole ø 3mm for oven lamp		

## lamps

## light bulbs



1

<b>Part No.</b>	359610	<b>Ref. No.</b>	EMPLLAHO
<b>description</b>	light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 47mm lens L 20mm for oven lamp type Philips		



1

<b>Part No.</b>	359740	<b>Ref. No.</b>	EMPLLAHO
<b>description</b>	light bulb t.max. 300°C socket E14 15W 230V ø 22mm L 48mm lens L 20mm for oven lamp IMPORT		



1

<b>Part No.</b>	359612	<b>Ref. No.</b>	EMPLL025
<b>description</b>	light bulb t.max. 300°C socket E14 25W 230V ø 25mm L 56mm lens L 30mm for oven lamp type Philips		

## halogen lamps

## for socket G4 / G6.35 / G9



1

<b>Part No.</b>	359945	<b>Ref. No.</b>	EMPLAL25
<b>description</b>	halogen lamp socket G9 230V 25W temp.-resist. 300°C		

## timers

## programme timers



1

<b>Part No.</b>	360492	<b>Ref. No.</b>	EMC6003 F33245 EMC6003 F3324S
<b>description</b>	timer CDC 6003F engines 1 chambers 3 operation time 324s 230V shaft ø 5mm shaft L 9mm motor type M48L ATS		

## mechanical timers





1

<b>Part No.</b>	350147	<b>Ref. No.</b>	EMTM0120
<b>description</b>	timer 2-pole operation time 120min impulse mechanical 2NO at 250V 16A shaft ø 6x4.6mm shaft L 23.5mm mounting distance 28mm mounting thread M4 connection male faston 6.3mm		




1

<b>Part No.</b>	350022	<b>Ref. No.</b>	EMFTC120
<b>description</b>	timer M2 2-pole operation time 120min impulse mechanical 2CO at 250V 16A permanent position yes shaft ø 6x4.6mm shaft 6x4.6mm shaft L 23mm mounting distance 28mm connection lateral		
<b>accessories for</b>	350022		
	<b>Part No.</b>	110366	<b>Ref. No.</b> —
	knob switch zero mark t.max. °C ø 44mm shaft ø 6x4.6mm shaft flat upper black		
	<b>Part No.</b>	110381	<b>Ref. No.</b> —
	dial plate graduation 120min permanent position yes rotation 0-300° ø 60mm timers knob ø 45mm with permanent position		



## alarm devices

### buzzer boards


			
1			
<b>Part No.</b>	350146	<b>Ref. No.</b>	EMFTES07
<b>description</b>	buzzer board connection male faston 4.8mm		

## contactors


### SIEMENS


#### power contactors

			
1			
<b>Part No.</b>	380652	<b>Ref. No.</b>	EMCNAH25
<b>description</b>	power contactor resistive load 22A 230VAC (AC3/400V) 9A/4kW main contacts 3NO auxiliary contacts 1NC connection screw connection type 3RT10-16-1AP02		

			
1			
<b>Part No.</b>	380389	<b>Ref. No.</b>	EMCN1H25
<b>description</b>	power contactor resistive load 22A 230VAC (AC3/400V) 9A/4kW main contacts 3NO auxiliary contacts 1NO connection screw connection type 3RT10-16-1AP01		


#### auxiliary contacts



			
1			
<b>Part No.</b>	380947	<b>Ref. No.</b>	EMCNAHA4 EMCNAHAU
<b>description</b>	auxiliary contact contacts 1NO/1NC AC15 3A for contactors 3RT102 3 RT103 connection screw connection type 3RH1921-1FA11		

			
1			
<b>Part No.</b>	380533	<b>Ref. No.</b>	EMCNAAHUM
<b>description</b>	auxiliary contact contacts 3NO/1NC AC15 3A for contactors 3RT101 connection screw connection type 3RT1911-1FA31 resistive load 10A AC-12 10A		

## relays

### relay sockets

			
1			
<b>Part No.</b>	380958	<b>Ref. No.</b>	EMRGLZX4
<b>description</b>	relay socket 8-pole connection plug-in connection round 8-pole 250V voltage AC 10A		

			
1			
<b>Part No.</b>	380137	<b>Ref. No.</b>	EMRGLZX4
<b>description</b>	relay socket 8-pole connection plug-in connection round 8-pole dimensions 65x28x40mm 380V voltage AC 10A Italiana Relè manuf. no. ZVE8		
<b>accessories for</b>	380137		
	<b>Part No.</b>	380805	<b>Ref. No.</b> —
	 support bracket		

### level relays

#### miscellaneous

			
1			
<b>Part No.</b>	402994	<b>Ref. No.</b>	EMRGLVX4
<b>description</b>	level controller 50/60Hz 8-pole 230V voltage AC 16A type RL30/1S/8		
<b>accessories for</b>	402994		
	<b>Part No.</b>	380958	<b>Ref. No.</b> EMRGLZX4
	 relay socket 8-pole connection plug-in connection round 8-pole 250V voltage AC 10A		



## electronic controllers

## TECNOLOGIC

## universal controllers

## built-in version



1

<b>Part No.</b>	379486	<b>Ref. No.</b>	EMRESCO4
<b>description</b>	electronic controller TECNOLOGIC type TLK38FCR---- mounting measurements 71x29mm 12V voltage AC/DC Pt100/TC (J,K) relay outputs 1 CO-16A(8) Pt100/TC (J,K) built-in depth 64mm defr. funct. no dependent on probe°C display 4 digits		

## probes

## producer-specific probes

## probes



1

<b>Part No.</b>	379756	<b>Ref. No.</b>	EMSONTERTEC
<b>description</b>	probe Pt100 cable PTFE probe -100 up to 450°C cable -40 up to +250°C connection 3-wire thread M12x1 probe ø4x50mm cable length 1.5m		



1

<b>Part No.</b>	379432	<b>Ref. No.</b>	EMSONTERTE
<b>description</b>	temperature probe Pt100 cable PTFE probe -100 up to 450°C cable -40 up to +250°C connection 3-wire thread 1/4" probe ø4x60mm cable length 1.1m		

## core probes



1

<b>Part No.</b>	379431	<b>Ref. No.</b>	EMSONSPEC
<b>description</b>	core temperature probe Pt100 cable PTFE probe -40 up to +250°C cable -40 up to +250°C connection 3-wire probe ø4x100mm thread 1/4" cable length 3m handle ø 12mm handle length 85mm		

## electronics

## PCBs



1

<b>Part No.</b>	403200	<b>Ref. No.</b>	ELSCRO5P
<b>description</b>	keypad PCB combi-steamer 6/10/20EMD L 180mm W 90mm buttons 5		



1

<b>Part No.</b>	402933	<b>Ref. No.</b>	ELSCAR5P
<b>description</b>	PCB autoreverse L 141mm W 63mm		

## keypads

## front foils



1

<b>Part No.</b>	403015	<b>Ref. No.</b>	CFRPC10X
<b>description</b>	keypad foil L 167mm W 99mm		



# solenoid valves


## solenoid valves (water)

ROBERTSHAW/INVENSYS

medium temperature: 90°C 90°C 60°C

ambient temperature: 60°C 25°C 60°C



duty cycle: 40% 100% 100%













1

<b>Part No.</b>	372015	<b>Ref. No.</b>	EMUAASRPE
<b>description</b>	solenoid valve single angled 230VAC inlet 3/4" outlet 11.5mm input 10l/min DN10 EATON (INVENSYS) flow regulating valve inlet white		










TP






1

<b>Part No.</b>	370025	<b>Ref. No.</b>	EMUA3C04
<b>description</b>	solenoid valve triple straight 230VAC inlet 3/4" outlet 11.5mm DN10 TP		
<b>spare parts for</b>	370025		
	<b>Part No.</b>	371013	<b>Ref. No.</b> —
solenoid coil TP 230VAC 50/60Hz			
<b>accessories for</b>	370025		
	<b>Part No.</b>	371220	<b>Ref. No.</b> —
reducer TP flow rate 3l/min red tolerance ±15%			
	<b>Part No.</b>	371221	<b>Ref. No.</b> —
reducer TP flow rate 5.5l/min yellow tolerance ±15%			
	<b>Part No.</b>	371222	<b>Ref. No.</b> —
reducer TP flow rate 6l/min grey tolerance ±15%			
	<b>Part No.</b>	371223	<b>Ref. No.</b> —
reducer TP flow rate 10l/min white tolerance ±15%			
	<b>Part No.</b>	371224	<b>Ref. No.</b> —
reducer TP flow rate 12l/min bronze tolerance ±15%			
	<b>Part No.</b>	371225	<b>Ref. No.</b> —
reducer TP flow rate 16l/min light brown tolerance ±15%			
	<b>Part No.</b>	371226	<b>Ref. No.</b> —
reducer TP flow rate 20l/min red tolerance ±15%			
	<b>Part No.</b>	371230	<b>Ref. No.</b> —
reducer TP flow rate 0.25l/min red tolerance ±25%			
	<b>Part No.</b>	371231	<b>Ref. No.</b> —
reducer TP flow rate 0.35l/min violet tolerance ±25%			

**accessories for** 370025

	<b>Part No.</b>	371232	<b>Ref. No.</b>	—
reducer TP flow rate 0.5l/min orange tolerance ±25%				
	<b>Part No.</b>	371233	<b>Ref. No.</b>	—
reducer TP flow rate 0.8l/min white tolerance ±25%				
	<b>Part No.</b>	371234	<b>Ref. No.</b>	—
reducer TP flow rate 1l/min light blue tolerance ±25%				
	<b>Part No.</b>	371235	<b>Ref. No.</b>	—
reducer TP flow rate 1.2l/min brown tolerance ±25%				
	<b>Part No.</b>	371236	<b>Ref. No.</b>	—
reducer TP flow rate 1.5l/min light brown tolerance ±25%				
	<b>Part No.</b>	371237	<b>Ref. No.</b>	—
reducer TP flow rate 2.5l/min yellow tolerance ±25%				
	<b>Part No.</b>	371238	<b>Ref. No.</b>	—
reducer TP flow rate 3.4l/min dark green tolerance ±25%				
	<b>Part No.</b>	371239	<b>Ref. No.</b>	—
reducer TP flow rate 5l/min black tolerance ±25%				
	<b>Part No.</b>	371240	<b>Ref. No.</b>	—
reducer TP flow rate 8l/min blue tolerance ±20%				

1










<b>Part No.</b>	370015	<b>Ref. No.</b>	EMUASRPE
<b>description</b>	solenoid valve single angled 230VAC inlet 3/4" outlet 11.5mm DN10 TP		
<b>accessories for</b>	370015		
	<b>Part No.</b>	371220	<b>Ref. No.</b> —
reducer TP flow rate 3l/min red tolerance ±15%			
	<b>Part No.</b>	371221	<b>Ref. No.</b> —
reducer TP flow rate 5.5l/min yellow tolerance ±15%			
	<b>Part No.</b>	371222	<b>Ref. No.</b> —
reducer TP flow rate 6l/min grey tolerance ±15%			
	<b>Part No.</b>	371223	<b>Ref. No.</b> —
reducer TP flow rate 10l/min white tolerance ±15%			
	<b>Part No.</b>	371224	<b>Ref. No.</b> —
reducer TP flow rate 12l/min bronze tolerance ±15%			
	<b>Part No.</b>	371225	<b>Ref. No.</b> —
reducer TP flow rate 16l/min light brown tolerance ±15%			


Table continues overleaf







accessories for		370015	
	Part No.	371226	Ref. No. —
	reducer TP flow rate 20l/min red tolerance ±15%		
	Part No.	371230	Ref. No. —
	reducer TP flow rate 0.25l/min red tolerance ±25%		
	Part No.	371231	Ref. No. —
	reducer TP flow rate 0.35l/min violet tolerance ±25%		
	Part No.	371232	Ref. No. —
	reducer TP flow rate 0.5l/min orange tolerance ±25%		
	Part No.	371233	Ref. No. —
	reducer TP flow rate 0.8l/min white tolerance ±25%		
	Part No.	371234	Ref. No. —
	reducer TP flow rate 1l/min light blue tolerance ±25%		
	Part No.	371235	Ref. No. —
	reducer TP flow rate 1.2l/min brown tolerance ±25%		
	Part No.	371236	Ref. No. —
	reducer TP flow rate 1.5l/min light brown tolerance ±25%		
	Part No.	371237	Ref. No. —
	reducer TP flow rate 2.5l/min yellow tolerance ±25%		
	Part No.	371238	Ref. No. —
	reducer TP flow rate 3.4l/min dark green tolerance ±25%		
	Part No.	371239	Ref. No. —
	reducer TP flow rate 5l/min black tolerance ±25%		
	Part No.	371240	Ref. No. —
	reducer TP flow rate 8l/min blue tolerance ±20%		

## solenoid valves with reducers

	1		
Part No.	370437	Ref. No.	EMUA2RPE
description	solenoid valve double angled 230VAC inlet 3/4" input 10l/min output 1.2/1.2l/min DN10 t.max. 90°C TP plastic flow regulating valve inlet white outlet 11.5mm output A 1.2l/min output B 1.2l/min flow regulating valve outlet A dark brown flow regulating valve outlet B dark brown		

	1		
Part No.	370644	Ref. No.	EMUA2C180
description	solenoid valve double straight 220-240VAC inlet 3/4" input 10l/min DN10 TP flow regulating valve inlet white outlet 11.5mm output A 1.5l/min output B 1.5l/min flow regulating valve outlet A brown flow regulating valve outlet B brown		




	1		
Part No.	370670 <sup>1</sup>	Ref. No.	EMUA3C04
description	solenoid valve straight triple 230VAC inlet 3/4" outlet 11.5mm 10 TP plastic with reducer set		

<sup>1</sup>with reducer set

## fans

## axial fans

## import

	1		
Part No.	601080 <sup>1</sup>	Ref. No.	EMMOAS10
description	axial fan L 119mm W 119mm H 38mm 230VAC 50/60Hz 23/20W bearing ball bearing connection male faston 2.8mm metal ADDA fan wheel ø 110mm temp.-resist. 70°C		
accessories for	601080		
	Part No.	550898	Ref. No. —
	connecting cable cable length 2000mm connection F 2.8 connection distance 7.9mm for axial flow fan		
	Part No.	692519	Ref. No. —
	guard L 120mm W 120mm plastic		

<sup>1</sup>with ball bearings





1

<b>Part No.</b>	601081 <sup>1</sup>	<b>Ref. No.</b>	EMMOAS6
<b>description</b>	axial fan L 80mm W 80mm H 38mm 230VAC 50/60Hz 14/13.5W bearing ball bearing connection male faston 2.8mm metal ADDA fan wheel ø 75mm temp.-resist. 70°C		
<b>accessories for</b>	601081		
	<b>Part No.</b>	691102	<b>Ref. No.</b> —
	guard ø 75mm mounting distance 71mm for axial fan 80mm		


<sup>1</sup>with ball bearings



### hot air fans

#### miscellaneous



1



<b>Part No.</b>	601011	<b>Ref. No.</b>	EMMVR150
<b>description</b>	hot air fan 220-240V 40W 50/60Hz L1 65mm L2 15mm L3 25mm L4 87mm fan wheel ø 150mm FIME type C25R8023CLH		
<b>accessories for</b>	601011		
	<b>Part No.</b>	550879	<b>Ref. No.</b> —
	insulation ø 130mm thickness 3mm hole ø 20mm for hot air fan		
	<b>Part No.</b>	601260	<b>Ref. No.</b> —
	nut thread M6L IT for hot air fan		

## pumps

### drain pumps

#### ASKOLL



1

<b>Part No.</b>	500346	<b>Ref. No.</b>	MCPOMPAMX
<b>description</b>	drain pump inlet ø 30mm outlet ø 22mm 230V 40W 50Hz ASKOLL type M231 XP with holder		

#### PLASET


1

<b>Part No.</b>	500514	<b>Ref. No.</b>	MCPOMPAMX
<b>description</b>	drain pump inlet ø 30mm outlet ø 22mm 230V 34W		

## electric accessories

### terminals

#### connection terminals with screw/faston connections



1

<b>Part No.</b>	550278	<b>Ref. No.</b>	EMMR1102
<b>description</b>	power terminal block 3-pole max. 40A max 400V connection ø6mm <sup>2</sup> / F6.3 temp.-resist. 150°C cross section 6mm <sup>2</sup>		



1


<b>Part No.</b>	550411	<b>Ref. No.</b>	EMMR1224
<b>description</b>	power terminal block 6-pole max. 40A max 450V connection $\phi 6\text{mm}^2$ / F6.3 temp.-resist. 150°C cross section 6mm <sup>2</sup>		

## gas valves and ignition boxes







### gas control valves

SIT

NOVASIT



1

<b>Part No.</b>	101914	<b>Ref. No.</b>	EMSIT822N
<b>description</b>	gas valve SIT series Novasit 822 230V 50Hz gas inlet 1/2" gas outlet 1/2" thermocouple connection pilot connection closed ignition pressurebar pressure range 3-30mbar pressure regulator connection blind equiv. no. 0.822.144		
<b>spare parts for</b>	101914		
	<b>Part No.</b>	101313	<b>Ref. No.</b> —
	solenoid coil 230V 50Hz		
	<b>Part No.</b>	101542	<b>Ref. No.</b> —
	solenoid coil 50Hz NOVA 822/826/827 suitable for NOVASIT 230V		
<b>accessories for</b>	101914		
	<b>Part No.</b>	101305	<b>Ref. No.</b> —
	gas connection straight 1/2" flange 45x45mm ELETTROSIT/V4400/4600/4605 suitable for SIT/HONEYWELL hole distance 36x36mm		
	<b>Part No.</b>	101306	<b>Ref. No.</b> —
	gas connection angled flange 45x45mm hole distance 36x36mm 1/2" ELETTROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL		
	<b>Part No.</b>	101307	<b>Ref. No.</b> —
	gas connection straight flange 45x45mm hole distance 36x36mm 3/4" ELETTROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL		
	<b>Part No.</b>	101308	<b>Ref. No.</b> —
	gas connection angled flange 45x45mm hole distance 36x36mm 3/4" ELETTROSIT/V4400/4600/4605 screw with O-ring suitable for SIT/HONEYWELL		
	<b>Part No.</b>	101503	<b>Ref. No.</b> —
	O-ring EPDM thickness 2mm ID $\phi 32\text{mm}$ Qty 1 pcs		
	<b>Part No.</b>	101924	<b>Ref. No.</b> —
	plug with cable L 1090mm suitable for NOVA 822/826/827		

## ignition boxes

BRAHMA



1

<b>Part No.</b>	107471	<b>Ref. No.</b>	EMCONFIN6G
<b>description</b>	ignition box BRAHMA type CM11 electrodes 2 waiting time 1.5s safety time 10s 230V 7VA 50-60Hz		

## ignition parts

### pilot burners

SIT

100 series



1


















<b>Part No.</b>	106906	<b>Ref. No.</b>	EMSITBP0
<b>description</b>	pilot burner SIT type 100 series 3 flames nozzle $\phi 0.2\text{mm}$ gas connection 6mm		
<b>spare parts for</b>	106906		
	<b>Part No.</b>	100245	<b>Ref. No.</b> —
	pilot burner nozzle LPG code 20 bore $\phi 0.2\text{mm}$ Qty 1 pcs thread M8x0.75		
	<b>Part No.</b>	100855	<b>Ref. No.</b> —
	pilot burner bracket triple		
	<b>Part No.</b>	100885	<b>Ref. No.</b> —
	air mixing sleeve for pilot burner Qty 1 pcs		
	<b>Part No.</b>	100916	<b>Ref. No.</b> —
	compression spring for pilot burner Qty 1 pcs		
	<b>Part No.</b>	100917	<b>Ref. No.</b> —
	gasket for pilot burner Qty 1 pcs aluminium		
	<b>Part No.</b>	100918	<b>Ref. No.</b> —
	screw for pilot burner		
	<b>Part No.</b>	107162	<b>Ref. No.</b> —
	pilot burner cap SIT 3 flames Hmm Lmm Qty 1 pcs		
	<b>Part No.</b>	107701	<b>Ref. No.</b> —
	pilot burner bottom part SIT 100 series nozzle $\phi 0.2\text{mm}$		
<b>accessories for</b>	106906		
	<b>Part No.</b>	100245	<b>Ref. No.</b> —
	pilot burner nozzle LPG code 20 bore $\phi 0.2\text{mm}$ Qty 1 pcs thread M8x0.75		


Table continues overleaf




accessories for		106906	
Part No.		Ref. No.	
	pilot burner nozzle natural gas bore $\varnothing$ 0.35mm Qty 1 pcs thread M8x0.75	100246	—
	locking screw M10x1 for pipe $\varnothing$ 4mm Qty 1 pcs	100904	—
	locking screw M10x1 for pipe $\varnothing$ 6mm Qty 1 pcs	100905	—
	pilot tube copper pipe $\varnothing$ 4mm thickness 1mm L 3000mm	102110	—
	pilot tube copper pipe $\varnothing$ 6mm thickness 1mm L 3000mm	102111	—
	pilot burner nozzle SIT natural/liquid gas bore $\varnothing$ 0.25mm Qty 1 pcs	107171	—
	pilot burner bottom part SIT 100 series nozzle $\varnothing$ 0.25mm	107700	—
	pilot burner bottom part SIT 100 series nozzle $\varnothing$ 0.35mm	107702	—

accessories


ignition electrodes


			
<b>Part No.</b>	100706	<b>Ref. No.</b>	EMSITCA0
<b>description</b>	ignition electrode connection M4 Qty 1 pcs		

electrodes

			
<b>Part No.</b>	100706	<b>Ref. No.</b>	EMSITCA0
<b>description</b>	ignition electrode connection M4 Qty 1 pcs		

ignition units

			
<b>Part No.</b>	102485	<b>Ref. No.</b>	EMACA000
<b>description</b>	ignition unit outputs 2 220-240VAC 0.6VA 50-60Hz		

			
<b>Part No.</b>	101002	<b>Ref. No.</b>	EMACA000
<b>description</b>	ignition unit outputs 2 230VAC dimensions 88x23x34mm mounting distance 73mm inlet F6.3x0.8 outlet F2.8x0.8 0.6VA 50/60Hz		


thermocouples

plug-in thermocouples

plug-in thermocouples standard

with barrel socket  $\varnothing$ 6(6.5)mm


thermocouples SIT

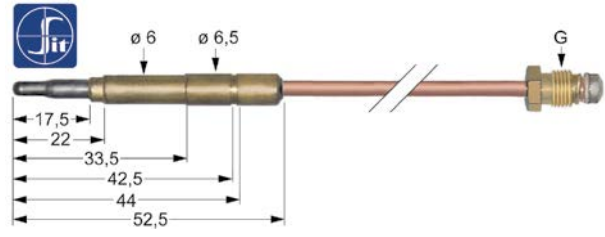			
<b>Part No.</b>	107614	<b>Ref. No.</b>	EMSITT150 EMSITT20
<b>description</b>	thermocouple SIT M9x1 L 1500mm plug connection $\varnothing$ 6.0(6.5)mm		

equipment-specific units

for convection ovens/combi-steamers

glass panels

			
<b>Part No.</b>	694560	<b>Ref. No.</b>	MCVE0002
<b>description</b>	glass panel L 388mm W 310mm thickness 4mm Qty 1 pcs		

1 gas components



## knobs

### producer-specific knobs

#### COVEN



1			
<b>Part No.</b>	111421	<b>Ref. No.</b>	MCMA0M0T
<b>description</b>	knob zero mark ø 48mm shaft ø 6x4.6mm shaft flat upper black		

## locks

### handle latches

#### universal

#### outside fixing

#### locks



1			
<b>Part No.</b>	694065	<b>Ref. No.</b>	MCCHSAMX
<b>description</b>	door handle for headed units L 145mm W 40mm H 62mm spring length 33mm outer black		
<b>spare parts for</b>	694065		
	<b>Part No.</b>	514390	<b>Ref. No.</b>
	spring for door handle ø 6mm L 54mm W 27.5mm		
	<b>Part No.</b>	694734	<b>Ref. No.</b>
	door handle L 165mm W 40mm H 25mm black		
	<b>Part No.</b>	694735	<b>Ref. No.</b>
	cap ø 32mm black		
<b>accessories for</b>	694065		
	<b>Part No.</b>	694066	<b>Ref. No.</b>
	door catch with spigot 2-stage L 28mm W 14mm H 15mm H1 16mm total length 51mm thread M8 thread L 23mm stainless steel		
	<b>Part No.</b>	694067	<b>Ref. No.</b>
	door catch with spigot 1-stage L 26mm total length 51mm thread M8		

### producer-specific

#### COVEN

#### group 1



1			
<b>Part No.</b>	694850	<b>Ref. No.</b>	MCPR3AMX
<b>description</b>	door catch with spigot 2-stage L 28mm W 14mm H 15mm H1 16mm total length 52mm thread M8		



1			
<b>Part No.</b>	694065	<b>Ref. No.</b>	MCCHSAMX
<b>description</b>	door handle for headed units L 145mm W 40mm H 62mm spring length 33mm outer black		
<b>spare parts for</b>	694065		
	<b>Part No.</b>	514390	<b>Ref. No.</b>
	spring for door handle ø 6mm L 54mm W 27.5mm		
	<b>Part No.</b>	694734	<b>Ref. No.</b>
	door handle L 165mm W 40mm H 25mm black		
	<b>Part No.</b>	694735	<b>Ref. No.</b>
	cap ø 32mm black		
<b>accessories for</b>	694065		
	<b>Part No.</b>	694066	<b>Ref. No.</b>
	door catch with spigot 2-stage L 28mm W 14mm H 15mm H1 16mm total length 51mm thread M8 thread L 23mm stainless steel		
	<b>Part No.</b>	694067	<b>Ref. No.</b>
	door catch with spigot 1-stage L 26mm total length 51mm thread M8		


#### group 2



1			
<b>Part No.</b>	694480	<b>Ref. No.</b>	MCPR2AMX
<b>description</b>	door catch with spigot 2-stage type DL24 L 42mm W 12mm H 18mm total length 62mm thread M8x1.25 thread L 20mm chrome-plated		
<b>accessories for</b>	694480		
	<b>Part No.</b>	694475	<b>Ref. No.</b>
	door handle for headed units bright finish type 1625L L 160mm W 39mm H 65mm spring length 30mm inner black plastic mounting distance 25mm flange 42x76mm mounting thread M5		







Table continues overleaf



accessories for		694480	
	Part No.	694476	Ref. No. —
door handle for headed units matt finish type 1625 L 160mm W 39mm H 65mm spring length 30mm inner black/chrome plastic mounting distance 25mm flange 42x76mm mounting thread M5			




<b>Part No.</b>	694475	<b>Ref. No.</b>	MCCHSAMX/2
<b>description</b>	door handle for headed units bright finish type 1625L L 160mm W 39mm H 65mm spring length 30mm inner black plastic mounting distance 25mm flange 42x76mm mounting thread M5		

accessories for		694475	
	Part No.	694477	Ref. No. —
door catch with spigot 1-stage type SL24 L 31.5mm W 12mm H 19.5mm total length 52mm thread M8x1.25 thread L 20.5mm chrome-plated			
	Part No.	694478	Ref. No. —
door catch with spigot 1-stage type SL42 L 31.5mm W 12mm H 19.5mm total length 67.5mm thread M8x1.25 thread L 36mm chrome-plated			
	Part No.	694479	Ref. No. —
door catch with spigot 1-stage type SL60 L 31.5mm W 12mm H 19.5mm total length 87mm thread M8x1.25 thread L 55.5mm chrome-plated			
	Part No.	694480	Ref. No. MCPR2AMX
door catch with spigot 2-stage type DL24 L 42mm W 12mm H 18mm total length 62mm thread M8x1.25 thread L 20mm chrome-plated			
	Part No.	694481	Ref. No. —
door catch with spigot 2-stage type DL42 L 42mm W 12mm H 18mm total length 78.5mm thread M8x1.25 thread L 36.5mm chrome-plated			
	Part No.	694482	Ref. No. —
door catch with spigot 2-stage type DL60 L 42mm W 12mm H 18mm total length 98mm thread M8x1.25 thread L 56mm chrome-plated			

edgmount latches

handle latches

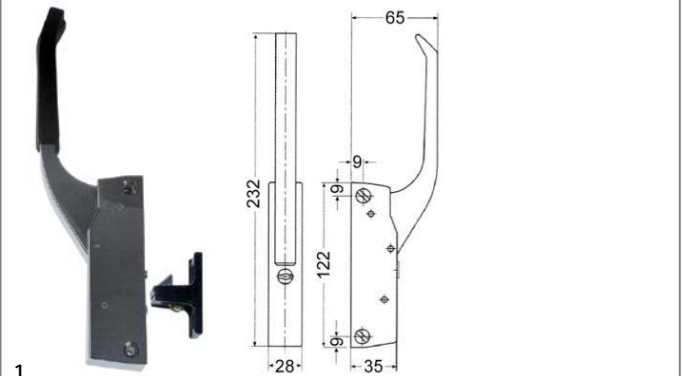

CAFF/FERMOD




<b>Part No.</b>	700906	<b>Ref. No.</b>	MCCHIN04P
-----------------	--------	-----------------	-----------

**description** catch L 122mm mounting distance 104mm heated units

**spare parts for** 700906

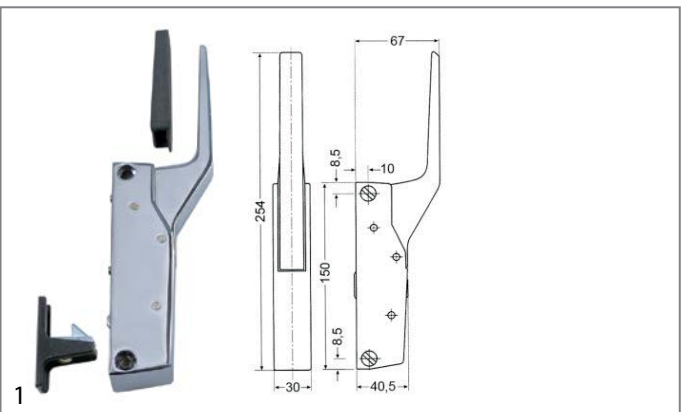

	Part No.	690419	Ref. No. —
door catch L 52mm W 20mm H 30mm mounting distance 26-37mm zamak for refrigeration units			
	Part No.	700062	Ref. No. —
handle protection heated units			



<b>Part No.</b>	701024	<b>Ref. No.</b>	MCCHIN04
-----------------	--------	-----------------	----------

**description** handle latch L 150mm mounting distance 133mm heated units type 790

**spare parts for** 701024


	Part No.	700061	Ref. No. MCCHINA04 MCCHNA04
door catch L 58mm W 20mm H 35mm mounting distance 42mm chrome-plated brass for headed units			
	Part No.	700062	Ref. No. —
handle protection heated units			



## door catches



1

<b>Part No.</b>	700061	<b>Ref. No.</b>	MCCHINA04 MCCHNA04
<b>description</b>	door catch L 58mm W 20mm H 35mm mounting distance 42mm chrome-plated brass for headed units		
<b>accessories for</b>	700061		
	<b>Part No.</b>	690414	<b>Ref. No.</b> —
	handle latch L 150mm mounting distance 133mm non lockable refrigeration units G 791		

## snap locks

## universal



1

<b>Part No.</b>	690596	<b>Ref. No.</b>	MCCHPI00
<b>description</b>	snap lock L 60mm W 15mm H 36mm mounting distance 48/28mm spring thickness 1.5mm complete with door catch zamak		

## espagnolette locks

## universal



1

<b>Part No.</b>	690041	<b>Ref. No.</b>	MCCHME10
<b>description</b>	cam L 148mm mounting distance 32mm		

## shelves and shelf rails

## grid attachments




1

<b>Part No.</b>	689001	<b>Ref. No.</b>	MCPR0003
<b>description</b>	bearing rail L 325mm H 15mm mounting pos. cavity W 15mm stainless steel for COVEN delivery pair		

## gaskets


## gaskets for heated units

## window seals



1


<b>Part No.</b>	901380	<b>Ref. No.</b>	MCGV0003
<b>description</b>	window gasket profile 1883 Qty supplied by meter		



1


<b>Part No.</b>	900782	<b>Ref. No.</b>	MCGV0002
<b>description</b>	window gasket profile 1889 Qty supplied by meter		

## door seals



1

<b>Part No.</b>	901381	<b>Ref. No.</b>	MCGP3/4P
<b>description</b>	door seal profile 2045 Qty supplied by meter		



1

<b>Part No.</b>	900778	<b>Ref. No.</b>	MCGPN004 / 470mm
<b>description</b>	door seal profile 2403 L 470mm Qty 1 mounting pos. vertical		



<b>Part No.</b>	901382	<b>Ref. No.</b>	MCGPN004 / 490mm
<b>description</b>	door seal profile 2403 L 490mm Qty 1 mounting pos. vertical		

<b>Part No.</b>	900781	<b>Ref. No.</b>	MCGPN004
<b>description</b>	door seal profile 2403 Qty supplied by meter		

<b>Part No.</b>	900779	<b>Ref. No.</b>	MCGPN004 / 600mm
<b>description</b>	door seal profile 2403 L 600mm Qty 1 mounting pos. horizontal		

<b>Part No.</b>	901326	<b>Ref. No.</b>	GUARNIPORTA106 MCGFC06N
<b>description</b>	door seal profile 2785 Qty supplied by meter		

<b>Part No.</b>	901383	<b>Ref. No.</b>	MCGPN004 / 700mm
<b>description</b>	door seal profile 2403 L 700mm Qty 1 mounting pos. horizontal		

<b>Part No.</b>	901169	<b>Ref. No.</b>	MCGP0002
<b>description</b>	door seal profile 2948 Qty supplied by meter		

<b>Part No.</b>	900780	<b>Ref. No.</b>	MCGPN004 / 890mm
<b>description</b>	door seal profile 2403 L 890mm Qty 1		

## measuring equipment

### thermometers

#### built-in thermometers

ø60mm

<b>Part No.</b>	541863	<b>Ref. No.</b>	EMTR0350
<b>description</b>	thermometer mounting ø 60mm 50-350°C probe ø 6mm probe L 19mm capillary pipe 1600mm		





## consumables

## sealants and adhesives

## high temperature silicone



1

<b>Part No.</b>	890266	<b>Ref. No.</b>	CSR60902
<b>description</b>	high temperature silicone COLLEX RED SILICONE t.max. -40 up to +250°C red tube 80ml		
<b>description</b>	COLLEX RED SILICONE - tube 80ml - red In-situ flat gaskets for transmissions, compressors, pumps, manifolds, etc. Sealing joints for lighting devices and caulking for electric passages. Good resistance to motor oils, water and coolants. Temperature range -40°C to +250°C.		

**GASTRO**PARTS.COM

