



**GASTROPARTS**

Universal Catalogue › Water Technology ›

# **[EN]** Water softeners

**[DE]** Wasserenthärter

**[ES]** Descalcificadores

**[FR]** Adoucisseurs

**[IT]** Addolcitori d'acqua

**[PL]** Zmiękczacze wody

**[RU]** Умягчители воды

✉ [gastroparts@gastroparts.com](mailto:gastroparts@gastroparts.com)

☎ tel. +48 56 657 00 66

📘 [fb.com/gastroparts.global](https://fb.com/gastroparts.global)

**GASTROPARTS.COM**





# water softeners

## manual softener



**technical data:**  
 control manual  
 diameter 190mm  
 width 255mm  
 operation pressure 1-8bar  
 water temperature 4-25°C

fig.	GEV No.	version	container capacity (l)	amount of resin (l)	salt amount/regeneration (kg)	capacity at 16°dH/20°e/29°fH (l)	H (mm)	connection	FR (l/h)	type
1	530161	with 2 valves	5	3.5	0.5	700	300	3/8"	1000	LT5
1	530120	with 2 valves	8	5.6	1	1120	400	3/8"	1000	LT8
1	530199	with 2 valves	8	5.6	1	1120	400	3/4"	1000	LT8
1	530121	with 2 valves	12	8.4	1.5	1680	500	3/8"	1000	LT12
1	530201	with 2 valves	12	8.4	1.5	1680	500	3/4"	1000	LT12
1	530126	with 2 valves	16	11.2	2	2240	600	3/8"	1000	LT16
1	530202	with 2 valves	16	11.2	2	2240	600	3/4"	1000	LT16
1	530127	with 2 valves	20	14	2.5	2800	900	3/8"	1000	LT20
1	530203	with 2 valves	20	14	2.5	2800	900	3/4"	1000	LT20
2	530167	with bypass valve	8	5.6	1	1120	400	3/8"	900	IV 8
2	530168	with bypass valve	12	8.4	1.5	1680	500	3/8" / 3/4"	900	IV12
2	530169	with bypass valve	16	11.2	2	2240	600	3/8"	900	IV16
2	530170	with bypass valve	20	14	2.5	2800	900	3/8"	900	IV20

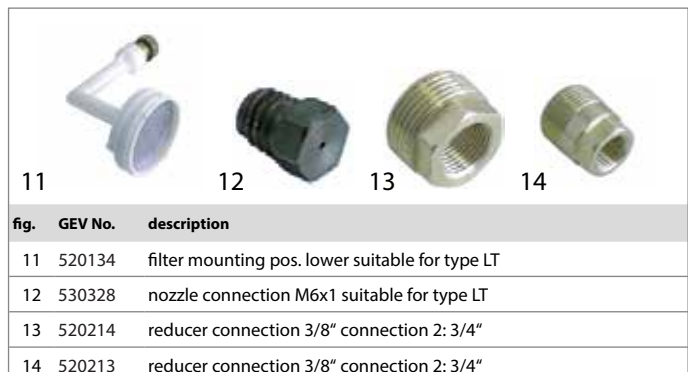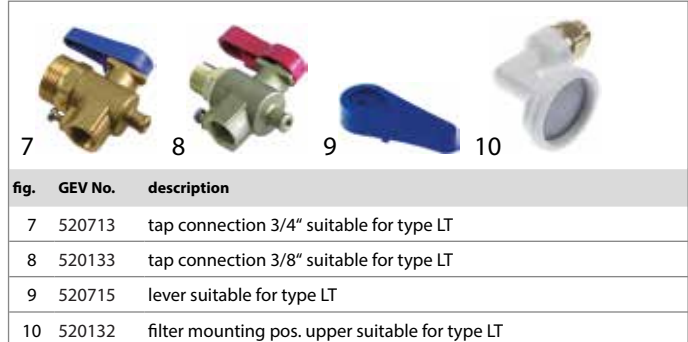



automatic softeners

with Autorol control 255/740i (timer)



1

**technical data:**  
 connection 3/4"  
 water temperature 6-25°C  
 flow rate 1500l/h  
 supply 230VAC

fig.	GEV No.	type	container capacity (l)	amount of resin (l)	salt amount/regeneration (kg)	capacity at 16°dH/20°e/29°fH (l)	W (mm)	L (mm)	H (mm)
1	530354	ATL	12	8	1.8	1680	325	550	660
1	530397	maxi	26	15	2.7	3360	310	430	1100

with Autotrol control Logix 255/740 (timer)



1

**technical data:**  
 operation pressure 2-8bar  
 water temperature 6-25°C  
 flow rate 1500l/h  
 supply 230VAC

fig.	GEV No.	type	container capacity (l)	amount of resin (l)	salt amount/regeneration (kg)	capacity at 16°dH/20°e/29°fH (l)	W (mm)	L (mm)	H (mm)	connection
1	530808	GIX5	5	3.8	0.5	700	230	380	515	1/2"
1	530809	GIX8	8	5.6	1	1120	250	480	540	1/2"
1	530843	GIX8	8	5.6	1	1120	250	480	540	3/4"
1	530824	GIX12	12	8.4	1.5	1680	290	425	665	3/4"

with control Autotrol 366/604 (timer)



1

**technical data:**  
 operation pressure 2-8bar  
 water temperature 6-25°C  
 flow rate 1500l/h  
 supply 230VAC

fig.	GEV No.	container capacity (l)	amount of resin (l)	salt amount/regeneration (kg)	capacity at 16°dH/20°e/29°fH (l)	W (mm)	L (mm)	H (mm)	connection
1	530825	5	3.8	0.5	700	230	355	420	3/8" / 3/4"
1	530522	5	3.8	0.5	700	230	380	515	1/2"
1	530826	8	5.6	1	1120	250	450	440	3/8" / 3/4"
1	530827	12	8.4	1.5	1680	290	400	550	3/8" / 3/4"

with Autorol control - AL series (timer)



1

**technical data:**  
 operation pressure 2-8bar  
 water temperature 4-25°C  
 flow rate 1500l/h  
 supply 230VACVAC

fig.	GEV No.	container capacity (l)	amount of resin (l)	salt amount/regeneration (kg)	capacity at 16°dH/20°e/29°fH (l)	W (mm)	L (mm)	H (mm)	connection
1	530527	5	3.5	0.6	700	230	360	515	3/4"
1	530528	8	5.5	1	1120	250	460	540	3/4"
1	530529	12	8.5	1.5	1680	285	405	595	3/4"

**with Autotrol control 255/760i (volumetric)**

**1**

**technical data:**  
 operation pressure 2-8bar  
 water temperature 6-25°C  
 flow rate 1500l/h  
 supply 230VAC

fig.	GEV No.	type	container capacity (l)	amount of resin (l)	salt amount/regeneration (kg)	capacity at 16°dH/20°e/29°fH (l)	W (mm)	L (mm)	H (mm)	connection
1	530355	AVL	12	8	1.8	1680	325	550	660	3/4"
1	530380	maxi	26	15	2.7	3360	310	430	1100	3/4"

**spare parts**

**1**

fig.	GEV No.	description	suitable for
1	530275	container L 435mm W 240mm H 320mm for GIX8	—


**2**
**3**

fig.	GEV No.	description	suitable for
2	530034	timer electric suitable for CABLT/MINI/MAXI	Bores
3	530041	power supply unit 6W 50Hz	Bores


**4**
**5**

fig.	GEV No.	description	suitable for
4	530087	valve tap head without gear selector drum	Bores
5	530036	camshaft suitable for CABLT/MINI/MAXI	Bores


**6**
**7**

fig.	GEV No.	description	suitable for
6	530037	O-ring set suitable for CABLT/MINI/MAXI	—
7	520528	valve set for softener suitable for GIX 5/8/12	—


**8**
**9**

fig.	GEV No.	description	suitable for
8	520719	gear motor 12V 50Hz type CABLT/MINI/MAXI	—
9	530038	air valve suitable for CABLT/MINI/MAXI	Bores


**10**
**11**
**12**

fig.	GEV No.	description	suitable for
10	520501	push-in fitting John Guest straight	—
11	520301 <sup>1</sup>	screw connection DMfit straight	—
12	520306	overflow stock type CABLT/MINI/MAXI	—

<sup>1</sup>thread size M20x1.5

**accessories**

**1**
**2**
**3**

fig.	GEV No.	description
1	530419	connection long thread 3/4" total length 65mm
2	530418	connection short thread 3/4" total length 54mm
3	530417	connection thread 3/8" total length 43,5mm


**1**
**2**

fig.	GEV No.	description
1	530476	bypass kit series 255
2	530225	by-pass suitable for AUTOROL



1		
fig.	GEV No.	description
1	530844	Chlorine generator for softener

**softener cartridges**

**BILT**

**B5 series**

**softener cartridges**



pos.	1
GEV No.	530501
type	B 52MX
capacity	3000 l/10°KH
water temperature (°C)	5°C up to 40
ø (mm)	150
H (mm)	370

**NiCal series**



**technical data:**  
 water temperature 0°C up to 40°C  
 insert type decarbonisation  
 application for espresso machine

fig.	GEV No.	type	capacity	ø (mm)	H (mm)
1	530511	Nical 125	25 l/10°KH	41	95
2	530512	Nical 250	50 l/10°KH	41	135
3	530513	Nical 450 B	75 l/10°KH	41	95

**OSCAR series**



**technical data:**  
 water temperature 5°C up to 40°C  
 insert type decarbonisation  
 application for coffee and espresso machines

fig.	GEV No.	description	type	capacity
1	530507	softener bag	Oscar 60	100 l/10°KH
1	530508	softener bag	Oscar 90	250 l/10°KH

**accessories**



fig.	GEV No.	description
1	530506	connecting fitting type R 8-3/8 connection 3/8"
2	440856	push-in fitting DMfit straight

**pre-filters**



fig.	GEV No.	description
1	530179	filter connection 1/2" ø 59mm L 58mm
1	530178	filter connection 3/8" ø 59mm L 58mm
2	530189	filter L 247mm ID ø 28mm ED ø 61mm mesh opening 0,05mm t.max. 80°C
3	530186	filter ø 58mm L 125mm



fig.	GEV No.	description
4	530187	mounting wrench
5	530183	pre-filter connection 1/2" ø 180mm L 180,5mm
5	530182	pre-filter connection 3/8" ø 180mm L 180,5mm





fig.	GEV No.	description
6	530188	pre-filter connection 3/4" ø 180mm L 306,5mm 5-20°C
7	520873	pre-filter for reverse osmosis device RoMatik XS

## descaling systems



fig.	GEV No.	product name	content (g)	packing
1	530118	4JT		can
2	530097	ScaleKleen	50	bag



fig.	GEV No.	product name	content (g)	packing
3	530098	ScaleKleen	200	bag
4	530099	ScaleKleen	1000	can

## regeneration salts



fig.	GEV No.	type	content (kg)	format
1	530238	BROXETTEN	25	tablets
2	530239	BROXO	25	-

## substitute resins



fig.	GEV No.	type	content (l)	weight (kg)
1	530273	Dowex HCR-S/S	6	5
1	530274	Dowex HCR-S/S	9	7.5
1	520136	Dowex HCR-S/S	25	20.5
2	530240	Purolite	25	20.5

## measuring devices



fig.	GEV No.	description
1	800358	control strip Chlorine Qty 100 pcs
2	800075	control strip pH 0-14pH Qty 100 pcs
3	800304	control strip pH 4.5-10 Qty 100 pcs



fig.	GEV No.	description
4	541474	control strip type water hardness test water hardness (German)
5	800034	measuring device total hardness and carbonate hardness




fig.	GEV No.	description
6	540621	measuring device type carbonate hardness general test
7	540620	measuring device type general test for water hardness



fig.	GEV No.	description
8	800306	measuring device type water hardness test water hardness (French)
9	800308	measuring device type water hardness test water hardness (German)

**EXPLODED VIEWS**  
Available round the clock in the GEV Webshop and App

**GASTROPARTS.COM**

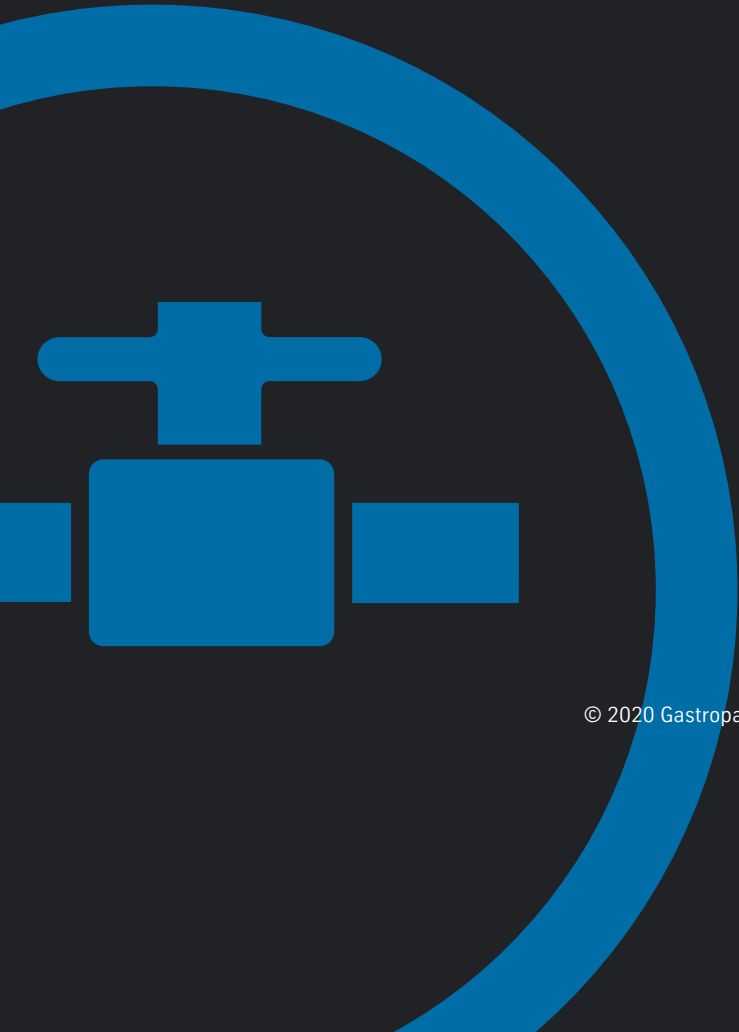

© 2020 Gastroparts Sp. J. All rights reserved.