



GASTROPARTS

Universal Catalogue › Water Technology ›

[EN] Water filters

[DE] Wasserfilter

[ES] Filtros de agua

[FR] Filtres à eau

[IT] Filtri d'acqua

[PL] Filtry do wody

[RU] Фильтры для воды

✉ gastroparts@gastroparts.com

☎ tel. +48 56 657 00 66

📘 fb.com/gastroparts.global

GASTROPARTS.COM





water filters

9

BRITA.	194
CUNO.	196
EVERPURE.	198
WATER&MORE.	202
miscellaneous.	203



water filters

BRITA

water filters

PURITY C



1

technical data:

flow rate 140l/h
 maximum operation pressure 8,6bar
 water temperature +4 up to +30°C
 application for water dispenser

fig.	Part No.	type	capacity (l)
1	530842	PURITY C1000 AC	10000

PURITY C Quell ST

carbonate hardness reduction specifically for coffee and vending machines



1

2

technical data:

maximum operation pressure 8,6bar
 flow rate 100l/h
 water temperature +4 up to +30°C

fig.	Part No.	type	capacity (l)
1	530866	PURITY C50 Quell ST	435-960
2	530832	PURITY C50 Quell ST	435-960
1	530863	PURITY C150 Quell ST	1278-2408
2	530833	PURITY C150 Quell ST	1278-2408
1	530864	PURITY C300 Quell ST	2199-4000
2	530834	PURITY C300 Quell ST	2199-4000
1	530865	PURITY C500 Quell ST	4125-6800
2	530835	PURITY C500 Quell ST	4125-6800

PURITY Clean

partial desalination for dishwashers



1

2

technical data:

maximum operation pressure 6bar
 flow rate 600l/h
 water temperature +4 up to +60°C

fig.	Part No.	type	capacity (l)
1	530379	Purity 1200 Clean	12000
2	530378	Purity 1200 Clean	12000

PURITY Clean Extra

full desalination specifically for glasswashers



1

2

technical data:

maximum operation pressure 6bar
 flow rate 300l/h
 water temperature +4 up to +60°C

fig.	Part No.	type	capacity (l)
1	530848	Purity 1200 Clean Extra	5000
2	530849	Purity 1200 Clean Extra	5000

PURITY Quell ST

partial desalination specifically for big coffee makers and combi-steamers
With or without MAE (electronic display)



technical data:

maximum operation pressure 6,9bar
water temperature +4 up to +30°C

fig.	Part No.	description	type	capacity (l)	FR (l/h)	version
1	530850	water filter	PURITY 450 Quell ST	2240-4217	350	with MAE
2	530851	water filter	PURITY 450 Quell ST	2240-4217	350	without MAE
3	530856	water filter	PURITY 450 Quell ST	2240-4217	350	-
1	530852	water filter	PURITY 600 Quell ST	4420-7207	350	with MAE
2	530853	water filter	PURITY 600 Quell ST	4420-7207	350	without MAE
3	530845	water filter	PURITY 600 Quell ST	4420-7207	120	-
1	530854	water filter	PURITY 1200 Quell ST	7253-13187	350	with MAE
2	530855	water filter	PURITY 1200 Quell ST	7253-13187	350	without MAE
3	530846	water filter	PURITY 1200 Quell ST	7253-13187	120	-

PURITY Steam

partial desalination specifically for combi-steamers
With or without MAE (electronic display)



technical data:

maximum operation pressure 6,9bar
flow rate 500l/h
water temperature +4 up to +30°C

fig.	Part No.	type	capacity (l)	version
1	530857	PURITY 450 Steam	2754-3680	with MAE
2	530858	PURITY 450 Steam	2754-3680	without MAE
3	530867	PURITY 450 Steam	2754-3680	-
1	530859	PURITY 600 Steam	4734-5771	with MAE
2	530860	PURITY 600 Steam	4734-5771	without MAE
3	530868	PURITY 600 Steam	4734-5771	-
1	530861	PURITY 1200 Steam	9521-10800	with MAE
2	530862	PURITY 1200 Steam	9521-10800	without MAE
3	530869	PURITY 1200 Steam	9521-10800	-

filter head



fig.	Part No.	connection	blend (%)
1	530836	3/8"	30
1	530464	3/8"	0-70
2	530456	John Guest 8mm	0-70

accessories



fig.	Part No.	description
1	520541	flex hose SS braid straight-curved DN8 connection 1: 3/4" connection 2: 3/8" L 1500mm
1	520584	flex hose SS straight-curved DN12 connection 1: 3/4" connection 2: 3/4" L 2000mm



fig.	Part No.	description
2	520540	flex hose connections 3/8" L 1500mm SS braid straight-straight with ball valve DN8



fig.	Part No.	description
3	520748	flex hose connections 3/8" DN DN8mm L 1500mm SS straight-straight with shut-off valve
4	520218	double nipple brass connection 3/8" - 3/4" Qty 1 pcs L1 12mm L2 12mm



fig.	Part No.	description
5	520542	reducer IT 3/8" ET 3/4" plastic total length 30mm WS 22 with gasket Qty 1 pcs
6	698668	shut-off valve IT 1" ET 3/4"
6	520749	shut-off valve IT 3/8" ET 3/4"
7	543007	backflow preventer plastic thread 3/8" IT - 3/8" ET total length 46mm



8

fig.	Part No.	description
8	698670	display for MAE



9

fig.	Part No.	description
9	698669	L 139mm cable length 1820mm plastic H 138mm blue for MAE



10

fig.	Part No.	description
10	698671	handle set for PURITY 1200
10	698672	handle set for PURITY 450/600




11

fig.	Part No.	description
11	530839	foot type PURITY C suitable for for PURITY C50/150/300 ID ø 94mm
12	530840	wall holder suitable for PURITY C Qty 1 pcs



13

fig.	Part No.	description
13	530841	cover suitable for PURITY C Qty 1 pcs

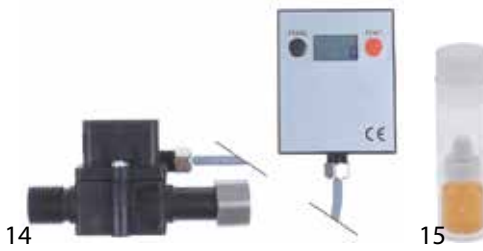

14

15

fig.	Part No.	description
14	530381	flow meter with digital display connection 3/4" IT - 3/4" ET total length 81mm
14	530055	flow meter with digital display connection 3/8" IT - 3/8" ET total length 81mm
15	800031	measuring device carbonate hardness

CUNO

filters

for ice cube maker



1

2

technical data:

maximum operation pressure 8,6bar
water temperature max. 38°C

fig.	Part No.	type	capacity (l)	FR (l/h)	for filter head
1	530091	HF20-SE	34069	342	VH3 BSPT
2	530258	HF30-S	52995	378	VH3 BSPT

for hot drinks



technical data:
maximum operation pressure 8,6bar

fig.	Part No.	type	capacity (l)	FR (l/h)	water temperature (°C)	for filter head
1	530020	P-124 BN-E	1600	114	max. 38	VH3 BSPT
2	530078	FC02	4000	120	40-100	AP2
3	530015	CS-51	5678	114	max. 38	AP-1-301-S
4	530519	CS-451	5678	115	max. 38	AP-1-301-S



technical data:
maximum operation pressure 8,6bar

fig.	Part No.	type	capacity (l)	FR (l/h)	water temperature (°C)	for filter head
5	530270	HF05-MS	5678	168	max. 38	VH3 BSPT
6	530022	CS-11	9464	228	max. 38	AP-1-301-S
7	530012	CS-14	9464	228	max. 38	QL2/QL3



technical data:
maximum operation pressure 8,6bar


fig.	Part No.	type	capacity (l)	FR (l/h)	water temperature (°C)	for filter head
8	530271	HF10-MS	13200	228	max. 38	VH3 BSPT
9	530013	CFS-9112-S	37854	342	max. 38	QL2/QL3
9	530018	SWC-9135	4920	114	max. 38	QL2/QL3

for cold drinks




technical data:
maximum operation pressure 8,6bar
water temperature max. 38°C

fig.	Part No.	type	capacity (l)	FR (l/h)	for filter head
1	530377	AP-1-C301-S	3000	114	AP-1-301-S
2	530478	AP2-C405-SG	4000	114	AP2
3	530255	AP3-C765	7600	168	VH3 BSPT
3	530256	AP3-C762-M	7600	168	VH3 BSPT
4	530010	CS-25	7571	228	QL2/QL3
4	530011	CFS-9812-X	34069	342	QL2/QL3

**connection heads**



1 2

fig.	Part No.	type	connection	version
1	530115	QL2	3/8" horizontal	without shut-off valve
2	530248	QL2B	3/8" horizontal	without shut-off valve




3 4

fig.	Part No.	type	connection	version
3	530106	QL3	3/8" vertical	with shut-off valve
4	530249	QL3B	3/8" vertical	with shut-off valve



5 6

fig.	Part No.	type	connection	version
5	530250	QL3Bi	3/8" vertical	with shut-off valve and manometer
6	530272	VH3 BSPT	3/8" horizontal	without shut-off valve



7

fig.	Part No.	type	connection	version
7	530375	AP-1-301-S	1/4" NPT	-

accessories


1 2 3

fig.	Part No.	description
1	530497	by-pass plug for cleaning for 3M filter system
2	530499	by-pass plug for cleaning for Cuno filter system
3	520218	double nipple brass connection 3/8" - 3/4"

EVERPURE**kits**


1

fig.	Part No.	type	application
1	530491	Clarix XXL	for dishwashers



2

fig.	Part No.	type	application
2	530492	Clarix L	for combi-steamer
2	530493	Clarix ULTRA 1500	for ice-cube maker
2	530494	Clarix M	for combi-steamer
2	530495	Clarix XXL	for combi-steamer

filters

for ice cube maker



technical data:
water temperature 4-30°C
suitable filter head Claris

pos.	Part No.	type	capacity (l)	operation p max (bar)
1	530390	Claris ULTRA 170	1500-1700	2-8
2	530385	Claris ULTRA 250	2250-2500	2-8
3	530386	Claris ULTRA 500	3750-4200	2-8
4	530387	Claris ULTRA 1000	7000-8500	2-8
5	530388	Claris ULTRA 1500	10000-12100	2-8
6	530389	Claris ULTRA 2000	16500-20000	2-8



technical data:
water temperature max. 38°C
suitable filter head QL2/QL3

fig.	Part No.	type	capacity (l)	FR (l/h)	operation p max (bar)	H (mm)
1	530056	2K Plus	5678	114	8.5	260
2	530177	4K Plus	11300	114	10	370
3	530247	Insurice 2000	34200	378	8.5	530

for hot drinks



technical data:
flow rate 228l/h
water temperature +4 up to +30°C
suitable filter head Claris

pos.	Part No.	type	capacity (l)	operation p max (bar)
1	530205	Claris M	1500-3000	2-8
2	530206	Claris L	2800-5600	2-8
3	530207	Claris XL	4000-8000	2-8
4	530208	Claris XXL	6600-13200	2-8



technical data:
water temperature 4-30°C
suitable filter head Claris

pos.	Part No.	type	capacity (l)	operation p max (bar)
1	530390	Claris ULTRA 170	1500-1700	2-8
2	530385	Claris ULTRA 250	2250-2500	2-8
3	530386	Claris ULTRA 500	3750-4200	2-8
4	530387	Claris ULTRA 1000	7000-8500	2-8
5	530388	Claris ULTRA 1500	10000-12100	2-8
6	530389	Claris ULTRA 2000	16500-20000	2-8



technical data:
water temperature max. 38°C

fig.	Part No.	type	capacity (l)	FR (l/h)	operation p max (bar)	for filter head	H (mm)
1	530110	BWSO 2000	486	114	10	-	530
2	530171	ESO 6	1780	114	10	QL2/QL3	380
3	530365	OCS ²	2840	114	10	QL2/QL3	260
4	530243	BH2	11300	114	10	QL2/QL3	370
5	530244	2CB5-S	11350	228	10	QL2/QL3	260



technical data:
water temperature max. 38°C

fig.	Part No.	type	capacity (l)	FR (l/h)	operation p max (bar)	for filter head	H (mm)
6	530103	4H	11355	114	10	QL2/QL3	370
7	530245	4CB5-S	22710	378	10	QL2/QL3	370
8	530165	MH2	34000	378	8.5	QL2/QL3	530
9	530246	7CB5-S	37854	378	10	QL2/QL3	530

for cold drinks

technical data:
water temperature max. 38°C
suitable filter head QL2/QL3

fig.	Part No.	type	capacity (l)	FR (l/h)	operation p max (bar)	H (mm)
1	530233	2DC	2840	114	8.6	260
2	530113	AC	2850	114	10	260
3	530101	4C	11000	114	10	370
4	530231	4DC	11300	114	8.6	370
4	530234	2CB5	11355	228	8.6	206
4	530235	4CB5	22710	378	8.6	370
4	530166	MC2	34000	378	8.5	530
4	530236	7CB5	37854	378	8.6	530

for combi-steamers

technical data:
flow rate 228l/h
water temperature +4 up to +30°C
suitable filter head Claris

pos.	Part No.	type	capacity (l)	operation p max (bar)
1	530205	Claris M	1500-3000	2-8
2	530206	Claris L	2800-5600	2-8
3	530207	Claris XL	4000-8000	2-8
4	530208	Claris XXL	6600-13200	2-8



technical data:
water temperature max. 38°C

fig.	Part No.	type	capacity (l)	FR (l/h)	operation p max (bar)	for filter head
1	530157	KLEEN-STEAM	22710	360	8.6	-
2	530235	4CB5	22710	378	8.6	QL2/QL3
2	530236	7CB5	37854	378	8.6	QL2/QL3
3	530198	SS-10	60000	360	8.6	-



technical data:
water temperature max. 38°C

fig.	Part No.	type	capacity (l)	FR (l/h)	operation p max (bar)	for filter head
4	530200	SR-X	60000	360	8.6	-
5	530254	SS-IMF	80000	360	8.6	-



fig.	Part No.	type	connection	version
3	530106	QL3	3/8" vertical	with shut-off valve
4	530249	QL3B	3/8" vertical	with shut-off valve



fig.	Part No.	type	connection	version
5	530250	QL3Bi	3/8" vertical	with shut-off valve and manometer
6	530209	Claris	3/8" horizontal	without shut-off valve

accessories



fig.	Part No.	description
1	530496	by-pass plug for cleaning
2	520218	double nipple brass connection 3/8" - 3/4"

connection heads



fig.	Part No.	type	connection	version
1	530115	QL2	3/8" horizontal	without shut-off valve
2	530248	QL2B	3/8" horizontal	without shut-off valve



WATER&MORE

BESTMAX



technical data:

flow rate l/h
 maximum operation pressure 2-8bar
 water temperature max. +4 up to +30°C
 application universal

pos.	Part No.	type	capacity (l)	ø (mm)	H (mm)
1	530071	bestmax X	455-720	88	300
2	530072	bestmax S	755-1200	88	385
3	530073	bestmax V	1895-3000	115	445
4	530074	bestmax M	2880-4560	130	500
5	530075	bestmax L	3945-5200	145	530
6	530076	bestmax XL	5155-6800	145	530
7	530173	bestmax 2XL	9100-12000	185	600

BESTMAX PREMIUM



technical data:

flow rate l/h
 maximum operation pressure 2-8bar
 water temperature max. +4 up to +40°C
 application cold/hot drinks

pos.	Part No.	type	capacity (l)	ø (mm)	H (mm)
1	530093	bestmax M Premium	2700-3250	130	450
2	530100	bestmax XL Premium	4300-5160	150	480

BESTCLEAR



technical data:

flow rate l/h
 maximum operation pressure 8bar
 water temperature max. 65°C
 application warewashing

pos.	Part No.	type	capacity (l)	ø (mm)	H (mm)
1	530366	bestclear EXTRA 2XL	3560	185	600
2	530359	bestclear 2XL	9720	185	600

accessories



fig.	Part No.	description
1	520218	double nipple brass connection 3/8" - 3/4" Qty 1 pcs L1 12mm L2 12mm
2	530070	filter head type besthead thread 3/8"



fig.	Part No.	description
3	530090	rinse tap type bestflush thread 3/8" for filter head



table water filter



1

fig.	Part No.	description
1	530352	table water filter 2,7l type longlifeMg2



2

fig.	Part No.	description
2	530457	filter cartridge capacity 120l longlifeMg2 Qty 3


miscellaneous



1

2

fig.	Part No.	description	suitable for
1	530439	water filter type ADMF1010M operation pressure max 10bar	Unox
2	530438	water filter operation pressure max 11bar water temperature 65°C for external tube ø (A) 8mm	Unox

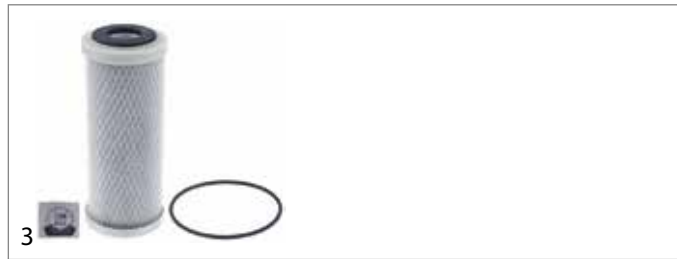


3

fig.	Part No.	description	suitable for
3	530384	filter insert MEIKO ø 64mm H 175mm	Meiko

water filters

GASTROPARTS.COM

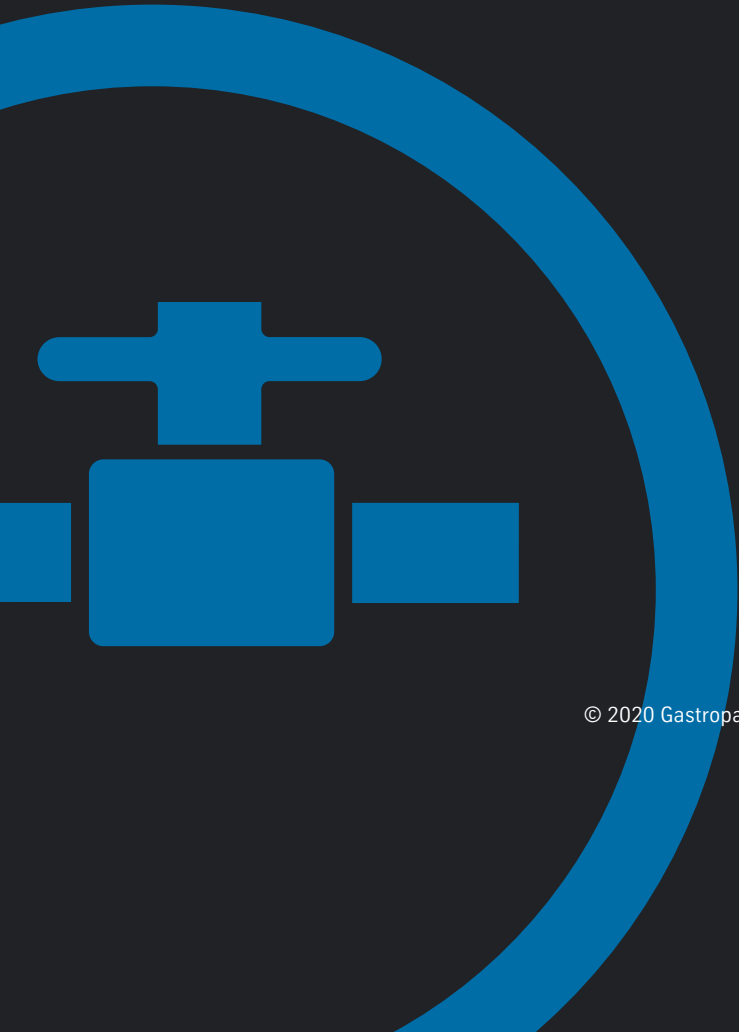

© 2020 Gastroparts Sp. J. All rights reserved.